

TECHNICAL DATA

FROM

Anemostat Door Products

4958 Stout Dr. #119, San Antonio, TX 78219
PH: 210.662.6300 • FAX: 210.662.2828

e-mail: door@anemostat.com • website: www.anemostat.com

SAFE-Wire®

1/4" (6mm)

WITH SURFACE APPLIED FILM
(Fire & Impact/Safety Rated)



FIRE RATED BY
UNDERWRITERS'
LABORATORIES




Sound
Transmission
Class

CATEGORY II IMPACT/SAFETY RATED
ANSI Z97.1 2004 U A

DETAIL DRAWING


FIRE & SAFETY RATED

MEETS CURRENT IBC CODE REQUIREMENTS

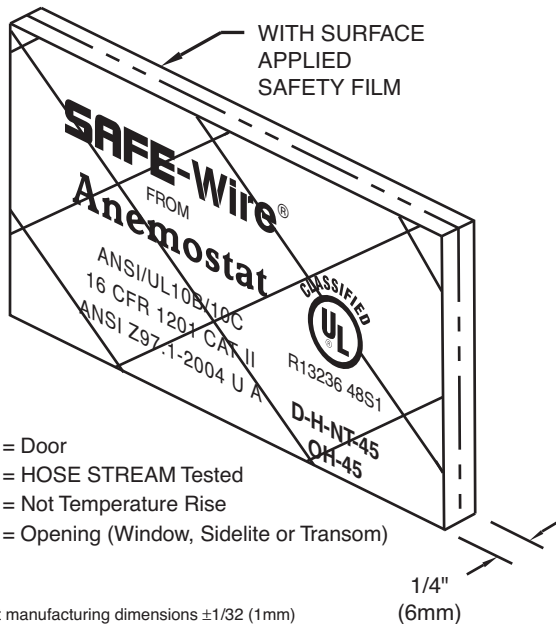


D = Door
H = HOSE STREAM Tested
NT = Not Temperature Rise
OH = Opening (Window, Sidelite or Transom)

Anemostat manufacturing dimensions $\pm 1/32$ (1mm)
Actual dimensions are nominal and may vary
based on component manufacturers tolerances.

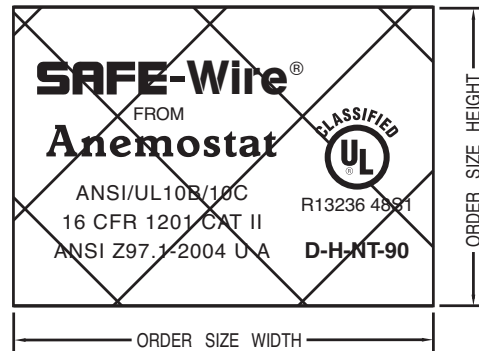

3/4" (19mm)
Diamond
Pattern

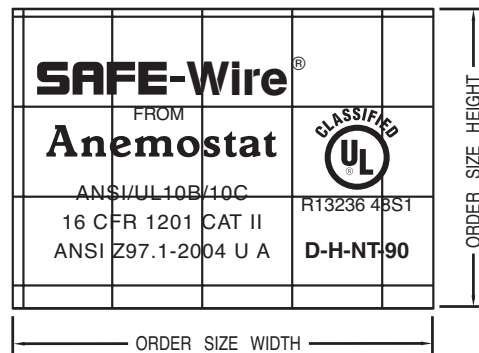

1/2" (13mm)
Square
(Georgian)
Pattern

STANDARD PRODUCT FEATURES

- MATERIAL:** 1/4" (6mm) Polished wire glass with surface applied safety film.
- FINISH:** Clear with 3/4" x 3/4" (19mm x 19mm) diamond, or 1/2" x 1/2" (13mm x 13mm) square wire pattern.
- INSTALLATION:** SAFE-Wire shall be glazed into the appropriate fire rated framing with GT-18, 1/8" (3.2mm) fire rated glazing tape (supplied loose), to both sides of glass.
- CLASSIFICATION MARKINGS:** Each piece of cut to size 1/4" (6mm) SAFE-Wire glass is permanently etched with the listing mark of U.L., in accordance with standards set forth by N.F.P.A - 80 revised.
- USES:** SAFE-Wire glass is a fire and impact/safety rated glazing material, composed of polished wire glass and a special clear surface applied safety film. It carries a listing for use in INTERIOR Doors, Sidelites, Transoms and Borrowed Lites with fire ratings from 20 minutes to 90 minutes.
- NOTE:** Film is applied to one side of SAFE-Wire only. However, Fire Rating is not dependent on which way film faces in interior applications.
- Occasional process marks or small occlusions may occur due to the filming method employed in manufacturing this product. However, this does not affect the fire/safety performance or general vision area of the glazing and should not be a cause for rejection. Please refer to our Quality Specifications & Inspection Guidelines for Filmed Glazing for additional information (page 3).
- IMPORTANT:** Interpretation of building and fire codes may vary. Consult with the local authority having jurisdiction in your area, to determine appropriate standards.

OPTIONAL FEATURES

- SIZES:** Customized glass sizes to fit most any shape vision frame.

FIRE RATINGS (w/ U.L. classification marking) Positive Pressure

- 20 MINUTE:** Approved listing at 2994 sq.in. (1.932 m²) visible lite.
- 45 MINUTE:** Approved listing at 1296 sq.in. (0.836 m²) visible lite.
- 60/90 MINUTE:** Approved listing at 100 sq.in. (0.065 m²) visible lite.
- NOTE:** Labeled sizes over 1296 sq.in. (0.836 m²) are available providing installation application is appropriately fire rated.

IMPACT / SAFETY RATINGS

- Meets ANSI Z97.1-2004 U A and CPSC 16CFR-1201.
- Category I - up to 9 sq. ft. (0.837 m²)
- Category II - over 9 sq. ft. (0.837 m²)

SOUND RATINGS with LoPro-STC

- LoPro-STC with SAFE-Wire:*** STC - 38
- TESTED SIZE:** 24" X 36" (610mm x 914mm) CUTOUT / ASSEMBLY
- TESTED IN ACCORDANCE WITH:** ASTM E90-09 and ASTM E2235-04. STC measurements determined in accordance with ASTM E413-04. Testing conducted at Western Electro - Acoustic Laboratory, Santa Clarita, CA.
- * Fire Rated

Job Name & Location	Submitted by

For Most Current Info, Consult Factory or check our website, www.anemostat.com