



TECHNICAL DATA  
FROM  
**Anemostat**<sup>®</sup>  
DOOR PRODUCTS  
A MESTEK COMPANY

P.O. BOX 4938 • 1220 WATSONCENTER ROAD  
CARSON, CA 90745-4206  
(310) 835-7500 • FAX (310) 835-0448

e-mail: [door@anemostat.com](mailto:door@anemostat.com) • website: [www.anemostat.com](http://www.anemostat.com)



**Laminated**

1/4" (6mm) or 5/16" (8mm)

NOT  
FIRE RATED

**CATEGORY II** IMPACT/SAFETY RATED  
ANSI Z97.1 2004 U A

**DETAIL DRAWING**

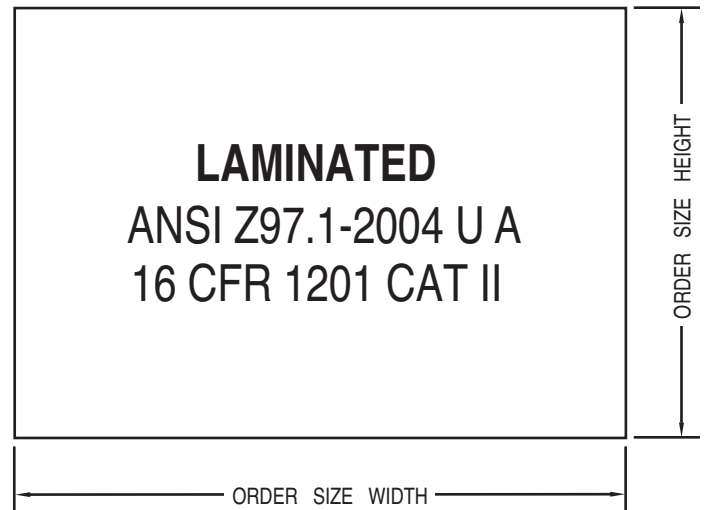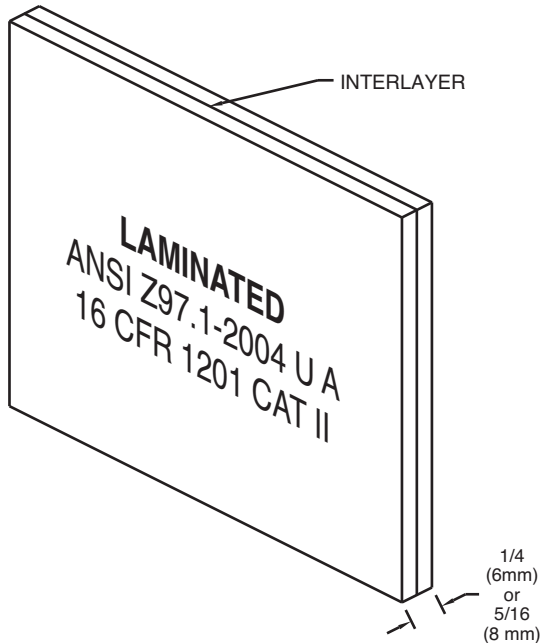

**STANDARD PRODUCT FEATURES**

- **MATERIAL:** 1/4" (6mm) or 5/16" (8mm) Laminated Glass is two sheets of glass with safety interlayer
- **SAFETY:** Glass breaks and numerous cracks appear but glass fragments tend to adhere to the interlayer.

**OPTIONAL FEATURES**

- **COLORS:** Available in Bronze, Gray, Graylite, and Obscure.
- **SIZES:** Available in many shapes and sizes

**IMPACT / SAFETY RATINGS**

- Meets ANSI Z97.1-2004 U A and CPSC 16 CFR 1201 Category II, Impact Test Standard.

**CONFORMS TO THE FOLLOWING STANDARDS**

- ASTM C1036
- ASTM C1048
- ASTM C1172

Job Name & Location	Submitted by