

TECHNICAL DATA
FROM
Anemostat
Door Products


4958 Stout Dr. #119, San Antonio, TX 78219
PH: 210.662.6300 • FAX: 210.662.2828
e-mail: door@anemostat.com • website: www.anemostat.com

DSFP-Perf

PERFORATED
SECURITY GRILLE
FACE PLATE

NOT FIRE RATED

DETAIL DRAWING

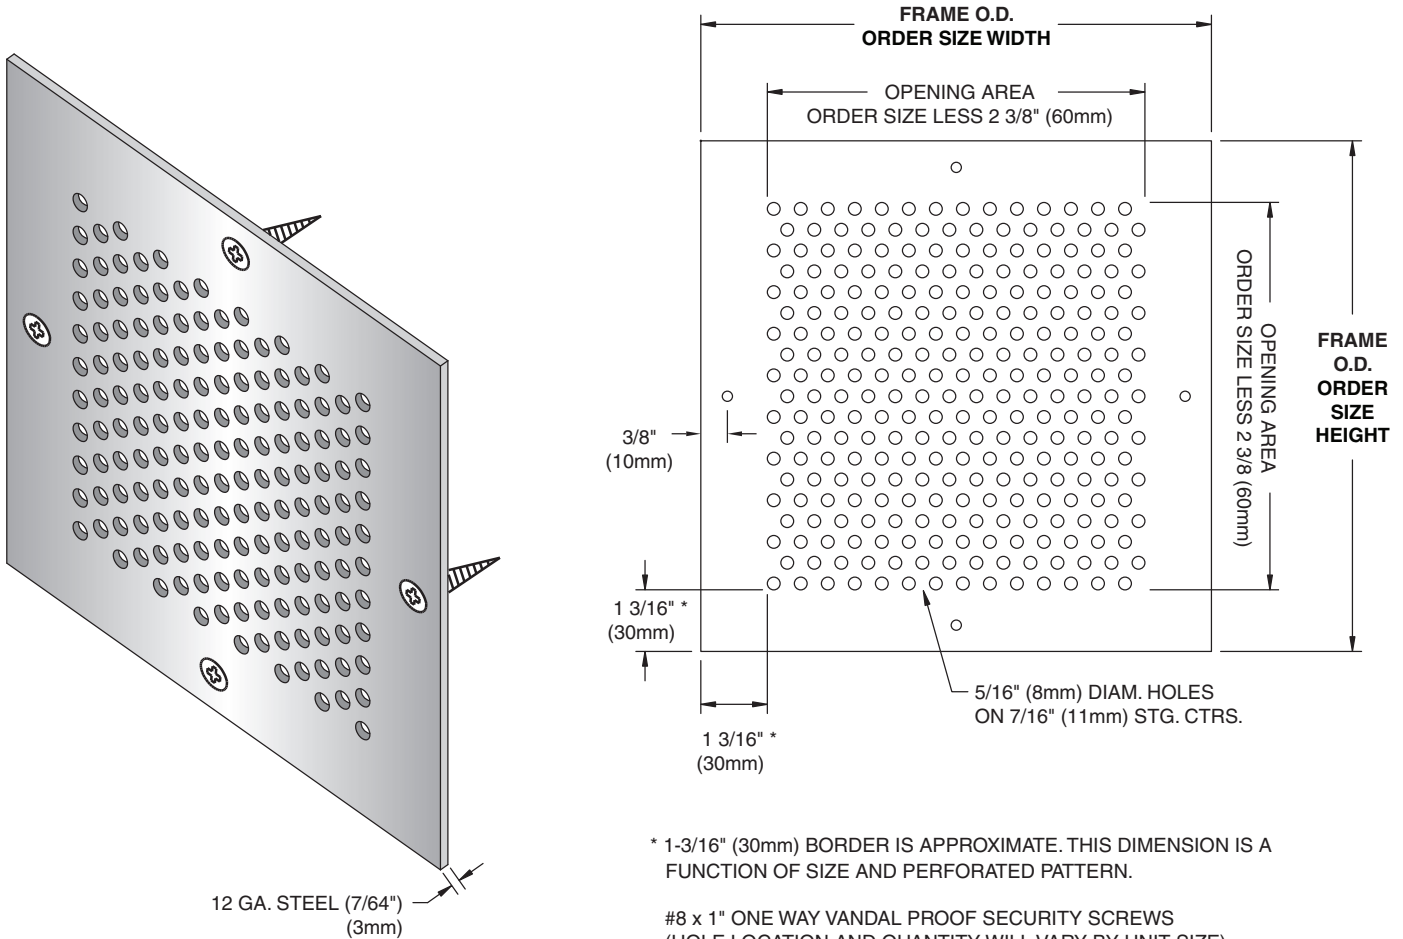

12 GA. STEEL (7/64")
(3mm)

All Dimensions $\pm 1/32$

STANDARD PRODUCT FEATURES

- **MATERIAL:** 12 GA. Cold Rolled Steel Perf. Face Plate Security Grille (with 5/16" diam. holes on 7/16" stag. ctrs.)
- **FINISH:** Grey Primer, Beige or Bronze Baked Enamel.
- **INSTALLATION:** Frame has countersunk mounting holes for #8 x 1" One Way Vandal Proof Screws that can be screwed directly thru the face plate into the wall or door.
- **FREE AIR FLOW:** 46% Free Area.
- **NOTE:** For Exterior use, High Humidity or Salt Air application, product must be Galvanized or Stainless Steel.
- **IMPORTANT:** Interpretation of building and fire codes may vary. Consult with the local authority having jurisdiction in your area, to determine appropriate standards.

OPTIONAL FEATURES

- **MATERIAL:** #304 or #316 Stainless Steel, #4 Finish (Satin), Galvanized (Hot Dipped or Zinc Plated). 10 gauge or 7 gauge.
- **FINISH:** Special order Baked Enamel Colors (as per sample chip, supplied by customer).
- **FASTENERS:** Special Security Screw Fasteners Available.
- **SPECIALS:** Fractional sizes, and other face plate patterns. Consult Factory. Can be fabricated without screw holes.

FIRE RATINGS

- DSFP-Perf is not fire rated.

Job Name & Location	Submitted by