



# TECHNICAL DATA

FROM

# Anemostat

## Door Products

4958 Stout Dr. #119, San Antonio, TX 78219  
 PH: 210.662.6300 • FAX: 210.662.2828


e-mail: [door@anemostat.com](mailto:door@anemostat.com) • website: [www.anemostat.com](http://www.anemostat.com)

# DSFP


SECURITY GRILLE  
FACE PLATE

NOT FIRE RATED

### DETAIL DRAWING

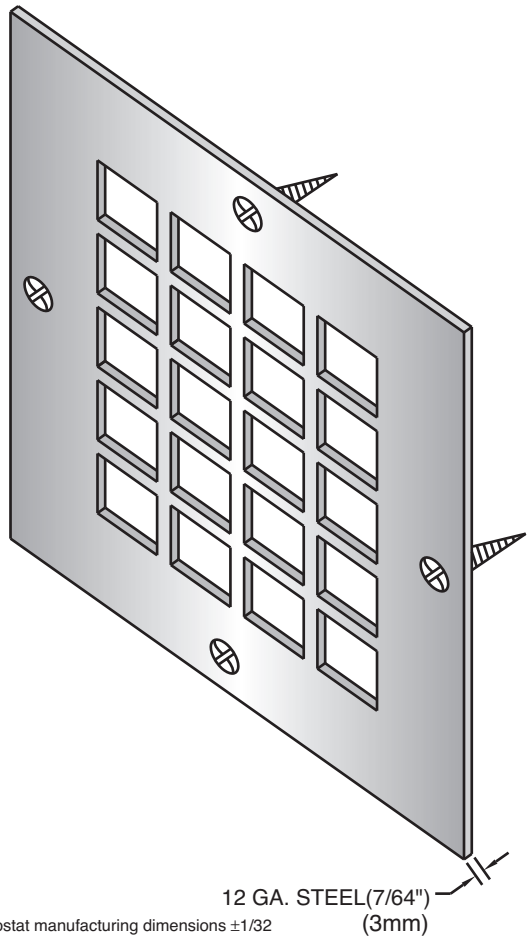

Anemostat manufacturing dimensions  $\pm 1/32$   
 Actual dimensions are nominal and may vary  
 based on component manufacturers tolerances.

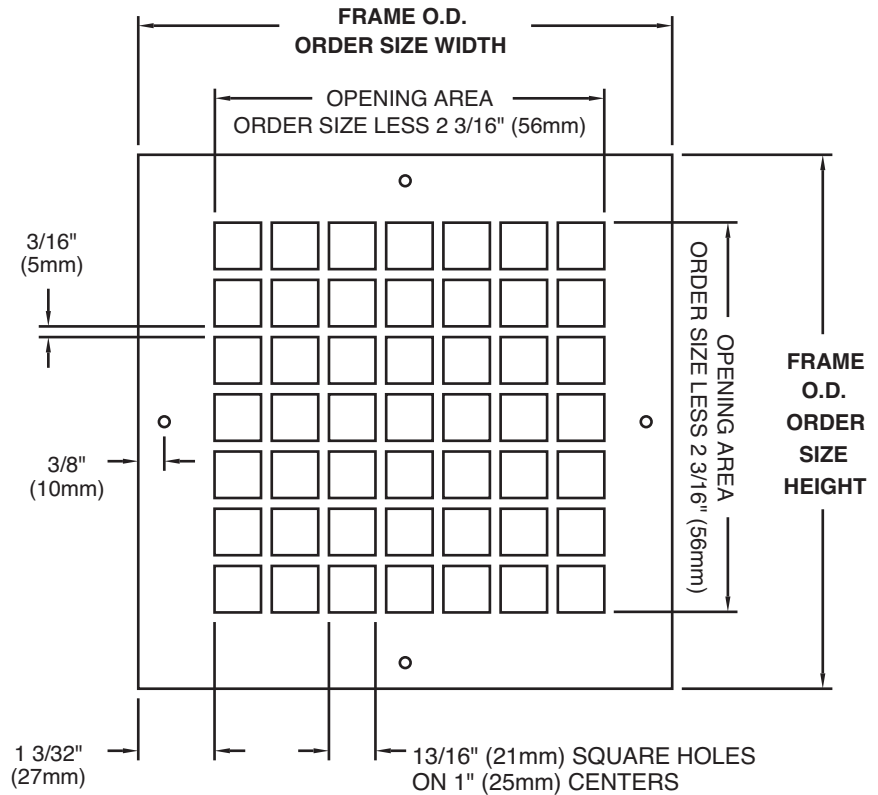

#8X1" ONE WAY VANDAL PROOF SECURITY SCREWS  
 (HOLE LOCATION AND QUANTITY WILL VARY BY SIZE)

#### STANDARD PRODUCT FEATURES

- **MATERIAL:** 12 GA. Cold Rolled Steel Lattice Face Plate Security Grille (with 13/16" square holes on 1" centers.)
- **FINISH:** Grey Primer, Beige or Bronze Baked Enamel.
- **INSTALLATION:** Frame has countersunk mounting holes for #8X1" one way vandal proof security screws, that can be screwed directly thru the face plate into wall or door.
- **DOOR OR WALL THICKNESS:** Will work on any thickness based on ability to accept a screw or fastener.
- **FREE AIR FLOW:** 66% Free Area.
- **NOTE:** For Exterior use, High Humidity or Salt Air application, product must be Galvanized or Stainless Steel.

#### OPTIONAL FEATURES

- **MATERIAL:** #304 or #316 Stainless Steel, #4 Finish (Satin), Galvanized (Hot Dipped or Zinc Plated). 10 gauge or 7 gauge.
- **FINISH:** Custom Baked Enamel Colors (as per sample chip, supplied by customer).
- **FASTENERS:** Special Security Screw Fasteners, See Page 26, this section.
- **SPECIALS:** Fractional sizes, and other face plate patterns.

#### FIRE RATINGS

- **DSFP is not fire rated.**

- **IMPORTANT:** Interpretation of building and fire codes may vary. Consult with the local authority having jurisdiction in your area, to determine appropriate standards.

Job Name & Location	Submitted by