



TECHNICAL DATA

FROM

Anemostat Door Products

4958 Stout Dr. #119, San Antonio, TX 78219
PH: 210.662.6300 • FAX: 210.662.2828

e-mail: door@anemostat.com • website: www.anemostat.com

HM-CLIP

HOLLOW METAL
DOOR CLIP



UNDERWRITERS'
LABORATORIES


FIRE
RATINGS



WARNOCK
HERSEY

FOR USE WITH ANEMOSTAT PRODUCTS

DETAIL DRAWING

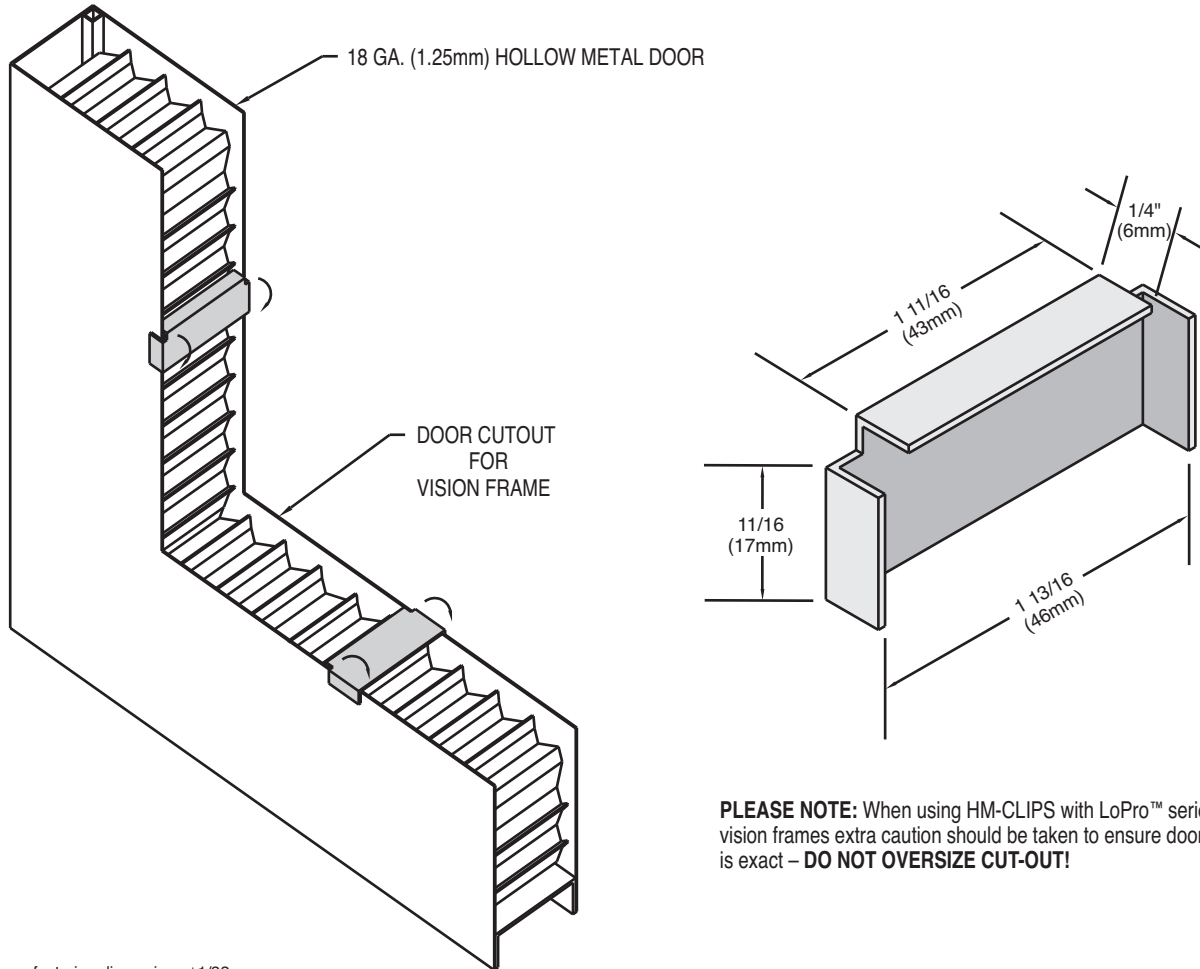

Anemostat manufacturing dimensions $\pm 1/32$
Actual dimensions are nominal and may vary
based on component manufacturers tolerances.

STANDARD PRODUCT FEATURES

- **MATERIAL:** 20 GA. (1mm) Cold Rolled Steel.
- **INSTALLATION:** Put long bent side of clip between door skins, then snap into place, fitting flush with the door cutout.
- **PURPOSE:** Prevents hollow metal door from collapsing when core burns away during a fire.
- **DOOR THICKNESS:** For 1 3/4" (44mm) Door only.
- **USES:** For use in Hollow Metal Door.
Replaces the need for reinforcing channel in all Anemostat Vision Frames and the FLDL-UL fusible link louver.

OPTIONAL FEATURES

- No clips required for 100 sq.in. Anemostat Visible Lite Frames.
- For Lites over 100 sq.in. visible lite.
 - One HM-Clip required on cutout sides 30" (762mm) to 60" (1524mm) centered in side (minimum U.L. requirements).
 - Two HM-Clips required on cutout sides over 60" (1524mm), equally spaced in side (minimum U.L. requirements).

FIRE RATINGS (w/ U.L. & W.H.I. classification markings) Positive Pressure

- 20/45/60/90 minutes listing approval from Underwriters Laboratory and Warnock Hersey for use on all Anemostat Vision Frames and the FLDL-UL Louver.

Job Name & Location	Submitted by

For Most Current Info, Consult Factory or check our website, www.anemostat.com